





CHECK VALVES - PRESSURE SEALED SWING CHECK VALVES

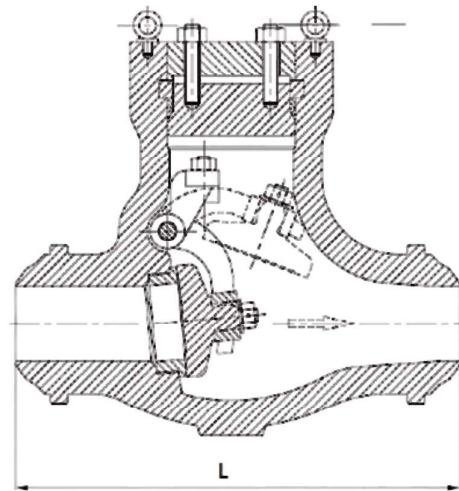

Likewise Pressure Sealed Gate & Globe Valves, FLOWTORQ Pressure Sealed Check Valves are best suited for high pressure applications like steam, liquid, catalytic reformers, hydrocrackers and other tough services. For High pressure, High temperature applications, Pressure seal globe valves continue to cater a wide range of industries with a safest, leakage free, pressure holding service. In opposition to bolted-cover valves, internal pressure applied to a pressure seal valve forces the sealing parts into more tighter contact—the higher the internal pressure, the tighter the seal. Afterwards the line pressure provides extra force to seal the gasket. Thus, as line pressure increases, the chances for leakage through the body-cover joint is less.

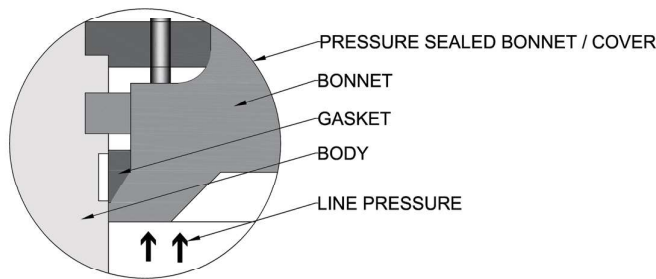

900#				
DN (inch)	L	Lw	H	WEIGHT (Kg) Approx
50 (2")	368	368	240	76
65 (2½")	419	419	250	86
80 (3")	381	381	260	98
100 (4")	457	457	320	145
125 (5")	559	559	350	175
150 (6")	610	610	382	259
200 (8")	737	737	530	565

(Code-SS)

1500#				
DN (inch)	L	Lw	H	WEIGHT (Kg) Approx
50 (2")	368	368	265	76
65 (2½")	419	419	275	93
80 (3")	470	470	290	140
100 (4")	546	546	385	232
125 (5")	673	673	430	362
150 (6")	705	705	470	490
200 (8")	832	832	625	990

(Code-SS)

2500#				
DN (inch)	L	Lw	H	WEIGHT (Kg) Approx
50 (2")	451	451	315	100
65 (2½")	508	508	345	185
80 (3")	578	578	380	225
100 (4")	673	673	410	370
125 (5")	794	794	495	595
150 (6")	914	914	560	805
200 (8")	1022	1022	695	1320

(Code-SS)

